


\*\*\*为防止LCD产生图像残留，在使用常黑面板时不要长时间显示固定图案。如果LCD需要显示固定图案，建议时间少于2分钟或者更短的时间内刷新显示内容一次或多次。  
 \*\*\*In order to prevent the LCD from producing image retention, do not display a fixed pattern for a long time when using a normally black panel. If the LCD needs to display a fixed pattern, it is recommended to refresh the display one or more times in less than 2 minutes or less.  
 强烈建议使用黑色图像或移动图像作为屏幕保护程序。It is strongly recommended to use a black image or moving image as a screen saver.

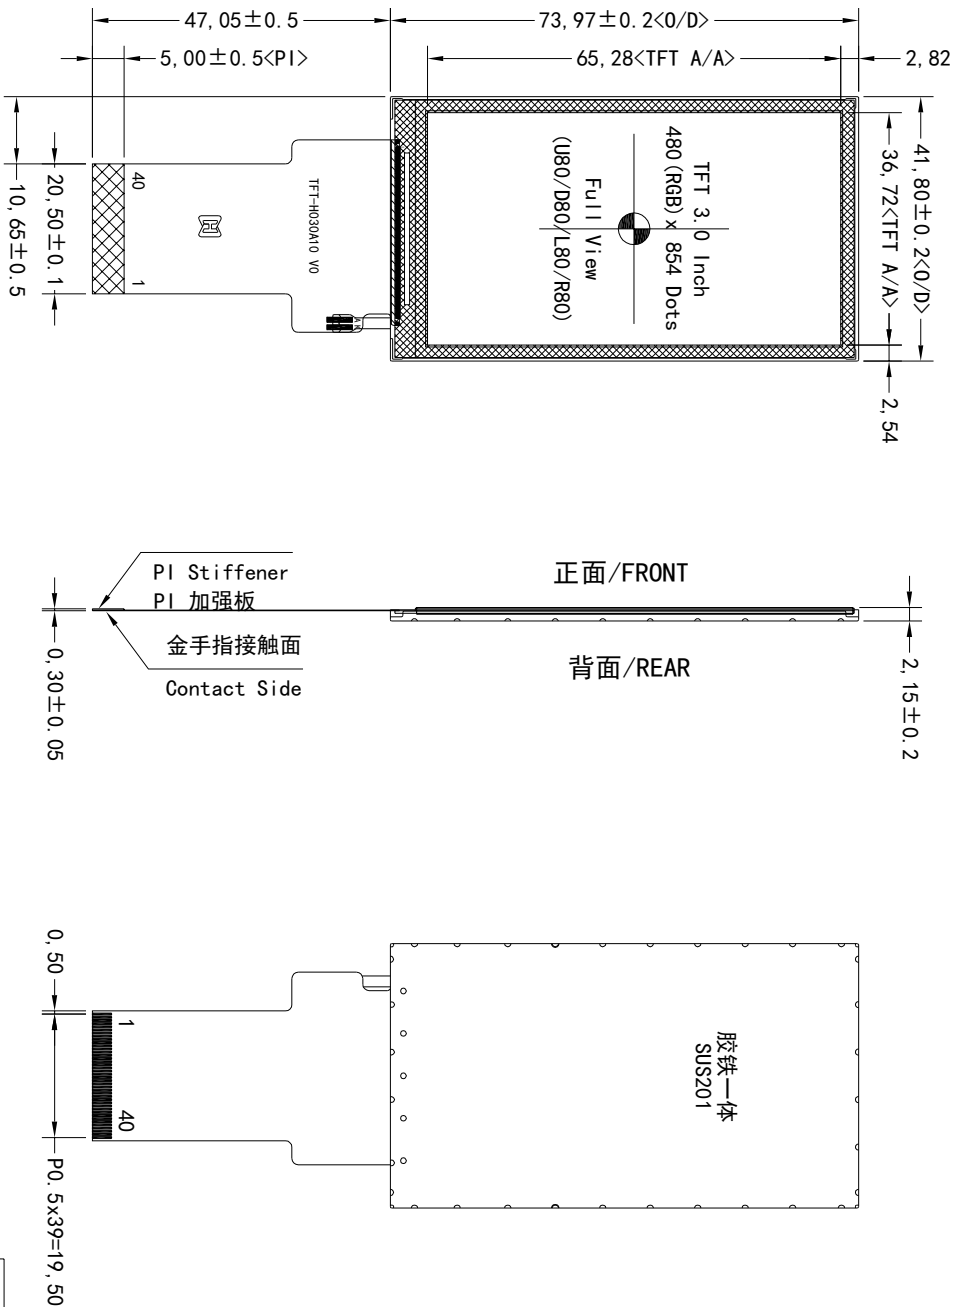


Pin_SIGNAL	Pin_SIGNAL		
1	LEDK	21	DB0
2	LEDA	22	DB1
3	GND	23	DB2
4	VCI	24	DB3
5	DR0	25	DB4
6	DR1	26	DB5
7	DR2	27	DB6
8	DR3	28	DB7
9	DR4	29	GND
10	DR5	30	PCLK
11	DR6	31	NC
12	DR7	32	HSD
13	DG0	33	VSD
14	DG1	34	DEN
15	DG2	35	IMO
16	DG3	36	GND
17	DG4	37	RESX
18	DG5	38	SP1_OS
19	DG6	39	SP1_SCL
20	DG7	40	SP1_SDA

IMO	MPU Interface Mode
0	RGB +9b_SPl (rise)
1	RGB +16b_SPl (fall)

\*Note1: 24-bit/pixel, Use DB[0:7], DR[0:7]  
 \*Note2: 18-bit/pixel, Use DG[0:5], DR[0:5]  
 \*Note3: 16-bit/pixel, Use DG[0:4], DR[0:4]. Fix to GND when not in use.

液晶显示类型 LCD Display Type	薄膜晶体管/透射式/常黑/16.7M 色 TFT/Transmissive/Normally Black/16.7M COOL	TFT 储存温度 TFT Storage Temp	-30 °C ~ 80 °C
观看方向/角度 Viewing Direction	Full View (U80/D80/R80/L80)	TFT 驱动芯片 Driver IC	ST7703或兼容芯片<TFT>
接口 Interface	RGB 24 Bit+3SP1	背光 Backlight	白色/10 LEDs/5颗串联2路并联
工作电压 Operating Voltage	VCI=3.3V, IONOC=1.8V(Typ)	液晶模组亮度 LOM Brightness	350 cd/m <sup>2</sup> (Typ)/固定电流测试
TFT 工作温度 TFT Operating Temp	-30 °C ~ 80 °C		



产品型号  
Product model

# HOT-HMI

TFT-H030A10FW1ST3N40

比例  
Scale

1:1

设计制图  
Design

Li u. YL

日期  
Date

2023-04-10

版本  
Ver

V0-0

单位  
Unit

MM

公差  
ToI.

±0.3